



MDA HT Series

SMD Moulded Inductor

Size 5040




FEATURES

-
- Ultra low buzz noise, due to composite construction
-
-
- AEC-Q200 qualified
- Operating temperature: -55 to +165 °C (including self-temperature rise)
- Quantity: 1500PCS


APPLICATION

- Headlamps, tail lamps and interior lighting
-
- Doors, window lift and seat control
-
-
- In-Vehicle Infotainment and navigation

Dimensions: [mm]

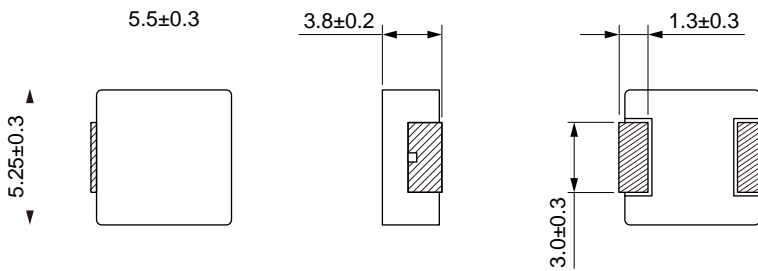


Land Pattern: [mm]















Electrical Properties:

Saturation Current will cause L to drop approximately 35%
 Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$



Typical Electrical Characteristics:

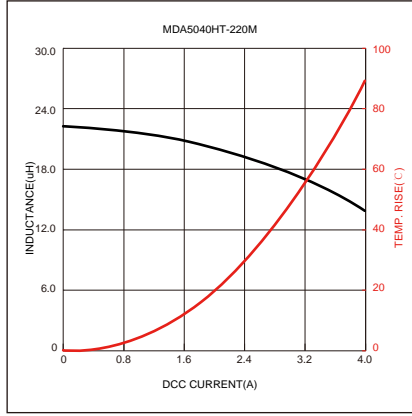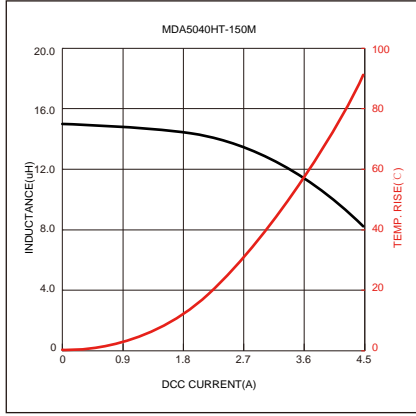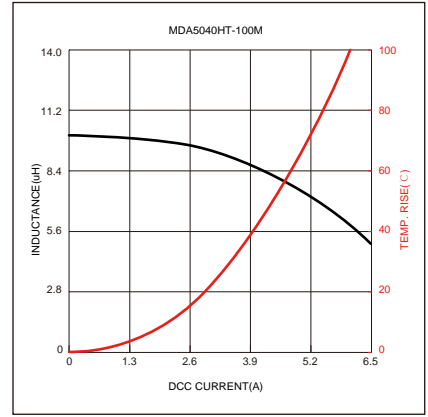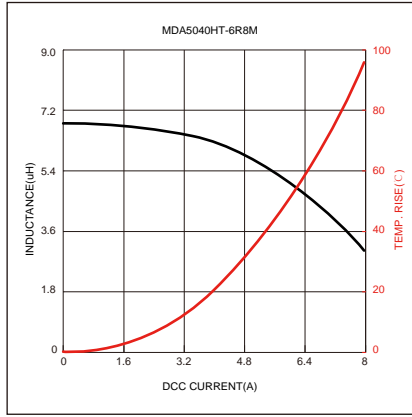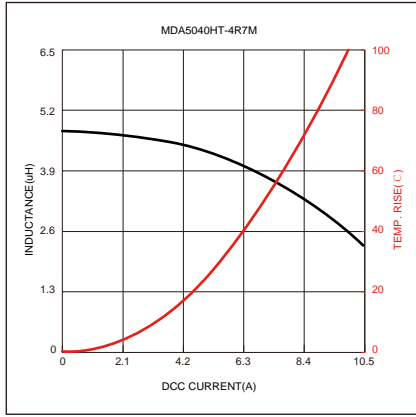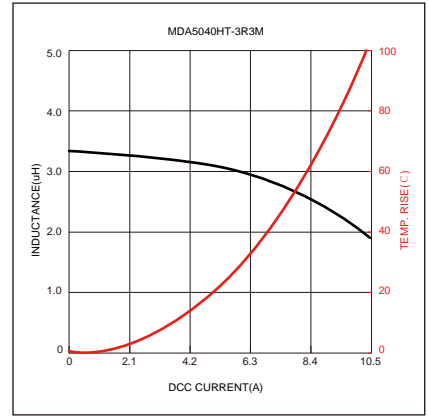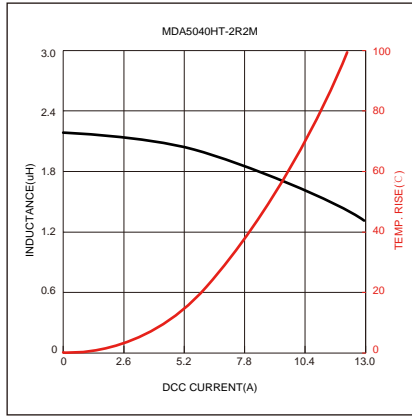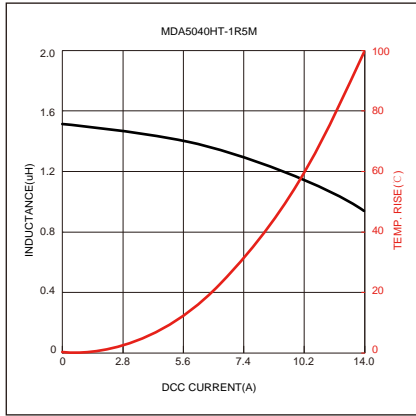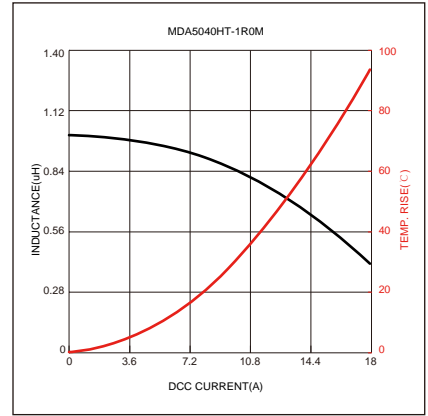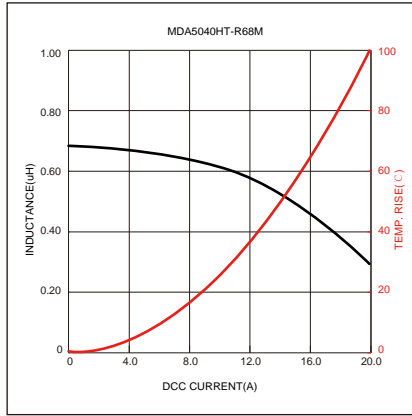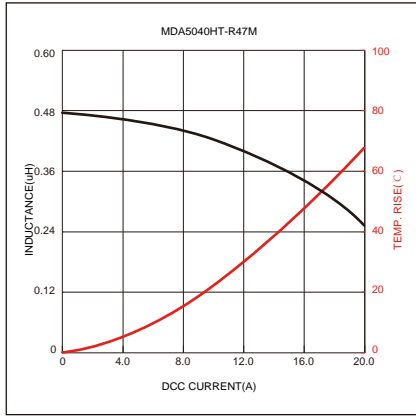





Reel Dimension: [mm]

Packaging Quantity: