

MDCA Series
SMD Power Inductor
Size 5030

FEATURES




- Carbonyl Powder.
- Compact design.
- High current, low DCR, high efficiency.
- Very low acoustic noise and very low leakage flux noise.
- High reliability.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +125 °C (including self-temperature rise)
- Quantity: 2000pcs

Dimensions: [mm]

Land Pattern: [mm]



Electrical Properties:

Typical Electrical Characteristics:

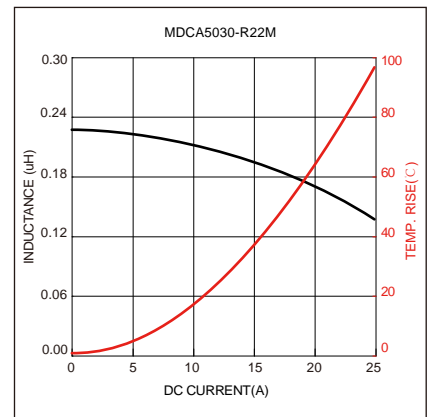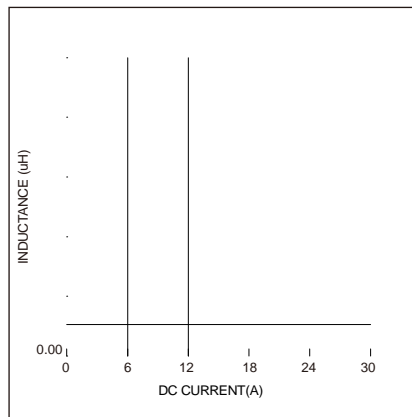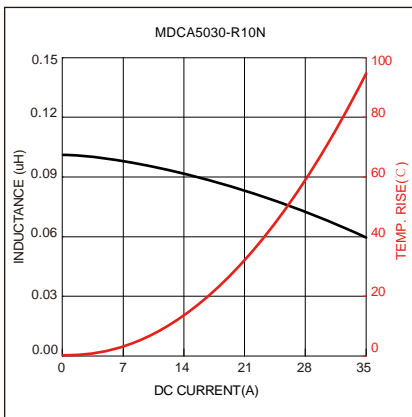

0.15	1	2
0	0	9

353

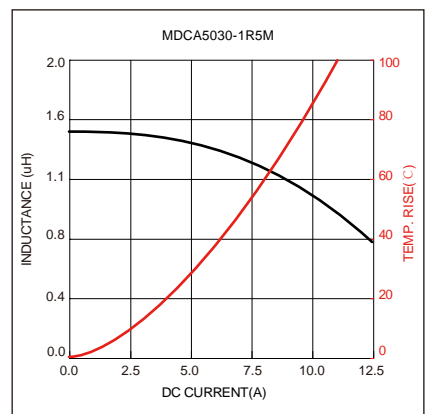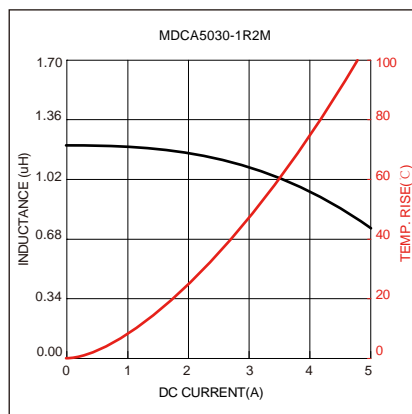


Soldering Reflow:

Packaging Information:


Tape Dimension :

Peel force of top cover tape:

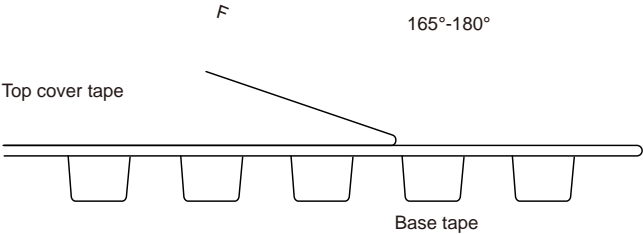



Reel Dimension: [mm]

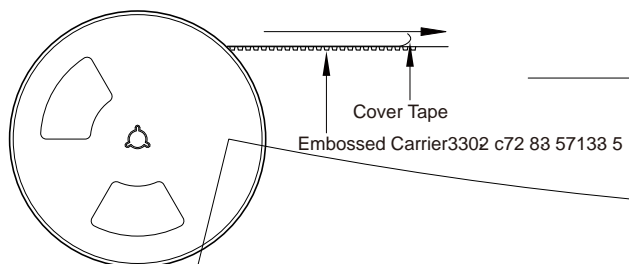

Packaging Quantity: