



MDSA Series




FEATURES

- O
-
-
- y
- ° -# j
- \ #
- j h#o

APPLICATION


- =
-
-)
-
-
- @ † @




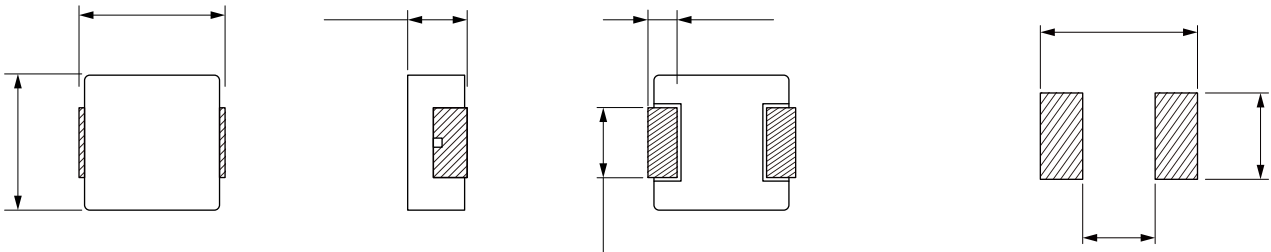



Part No	Inductance @ 100KHz/1V	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Current Typ. (A)	Current Max. (A)	DC Resistance Typ.	DC Resistance Max.
U) o° k U								
U) o° k U								
U) o° k U								




△

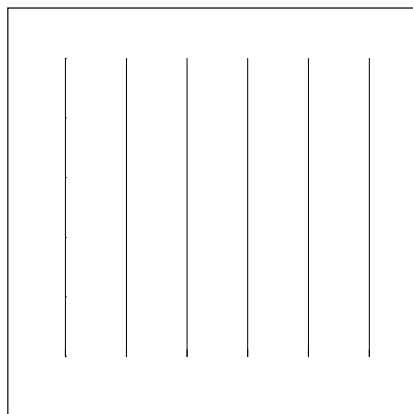

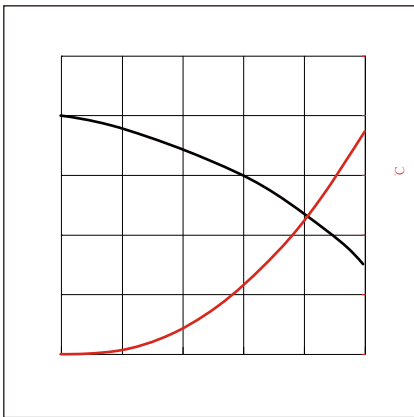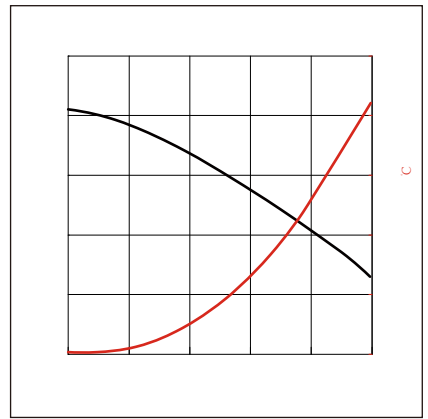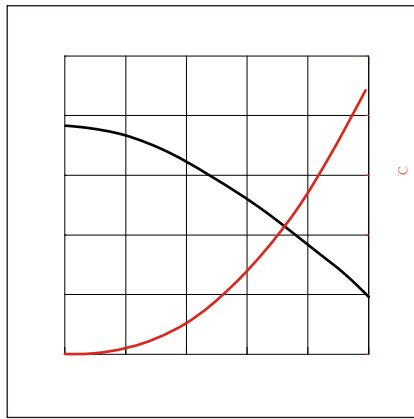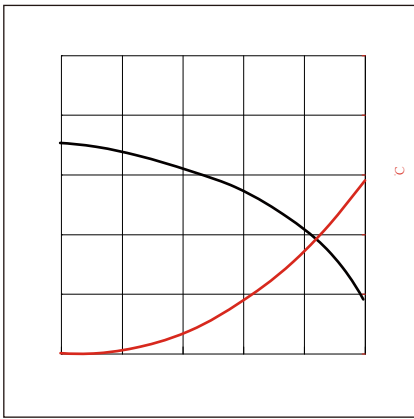


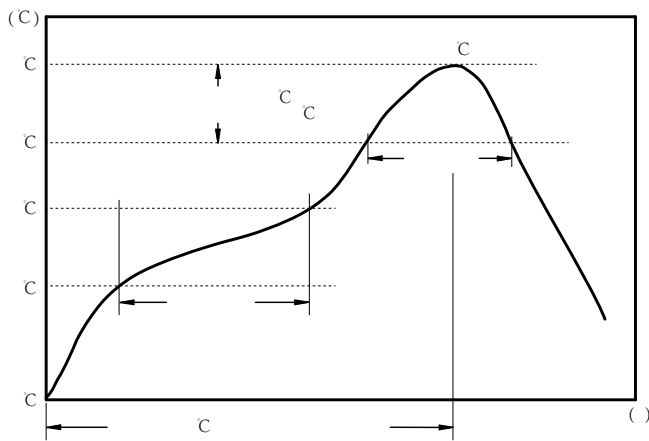

:

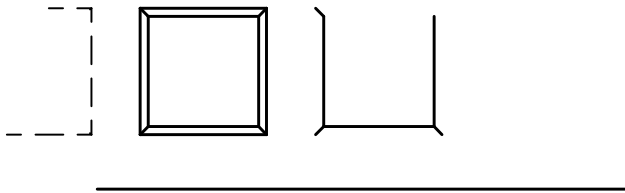

MDSA4020	4.5± 0.1	4.85± 0.1	1.5± 0.1	4.0± 0.1	8.0± 0.1	12.0± 0.3	2.3± 0.1	1.75± 0.1	0.35± 0.05



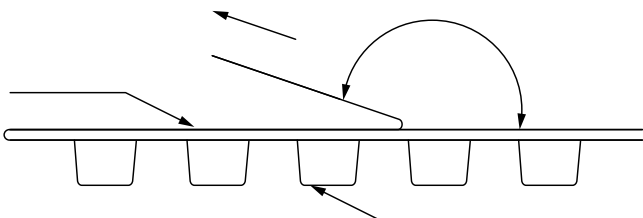


The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	K+Printing Inductance)
---------	------------------------




:

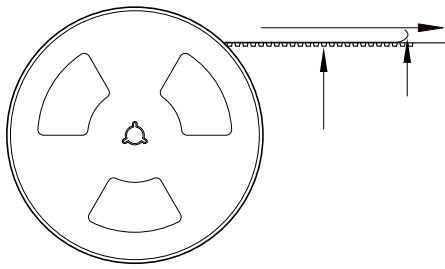

3000 Pcs/Reel



3 Reel /Inner box(9000 Pcs)



3 Inner box/Carton box(27K Pcs)

:

-
-
-
-
-
-
-
-
-