



- Higher current carrying Capacity, lower DCR, and more e ciency.
- Opera ng temperature: -55 to +125 °C(Including self - temperature rise).
- Quan ty: 400PCS

- AI Servers, Data Centers, GPU/AI Accelerators.
- Desktop Motherboards, CPU/GPU Power Delivery.
- Mul -phase VRM, High-current DC-DC Converters.
- Networking Equipment, Communica on Infrastructure.



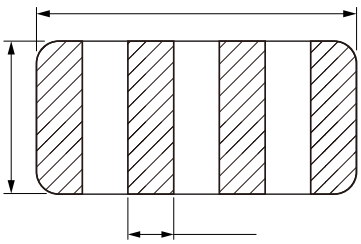


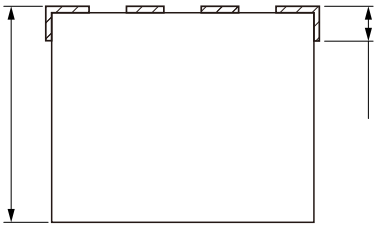

Part No	Inductance 1-4/2-3 @ 100KHz/1V (μH)	FLL 1-4 Min. (nH)	DC Resistance 1-4 (mΩ)	DC Resistance 2-3 (mΩ)	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	Hi-Pot Min. (V)	Kps Min.

△

:

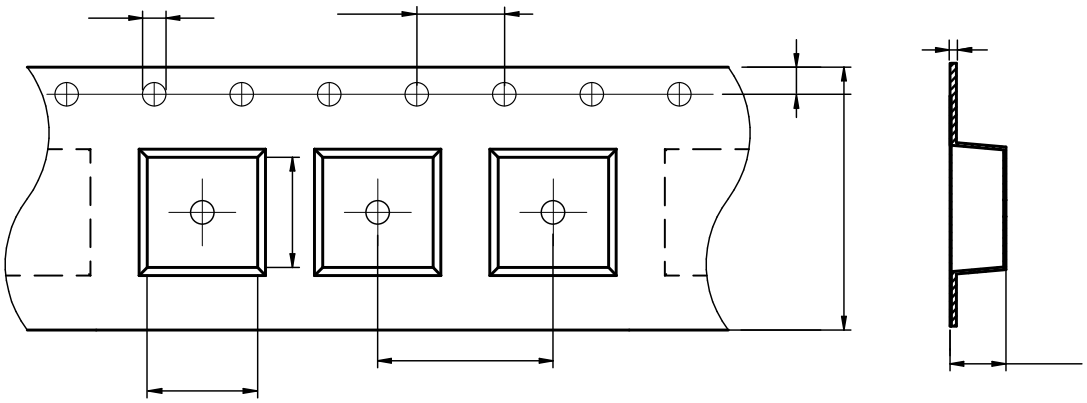

Marking	Printing Inductance)